




HEATER POWER CONTROLLER

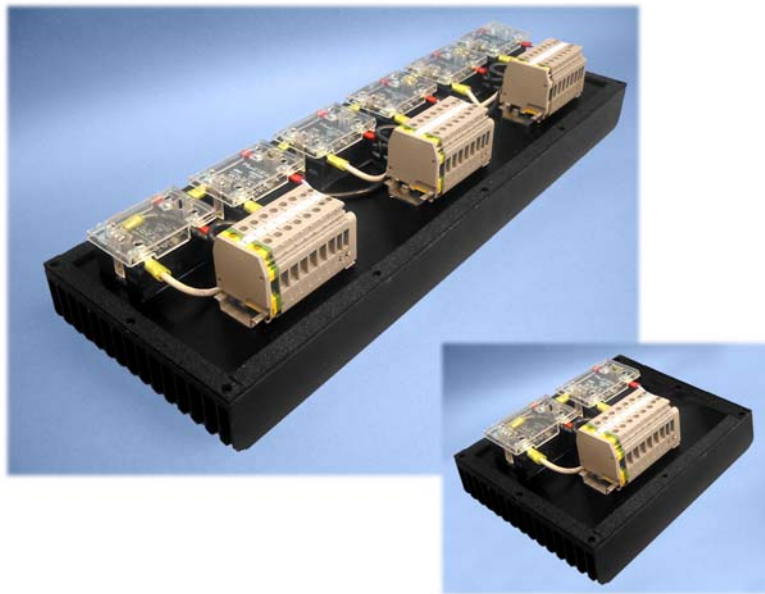

1/04
Rev 03

**PROCON
MODEL HPC
TABLE OF CONTENTS**

DESCRIPTION..... 1

MANUAL REVISIONS..... 5

WARRANTY..... 5

SPECIFICATIONS 6

DRAWINGS

PHYSICAL DIMENSIONS 44-090095-30-00 7

PANEL CUTOUT DIMENSIONS 49-090096-30-00..... 8

1 PHASE MAX CONFIG WIRING DIAGRAM 12-090098-20-00 9

3 PHASE MAX CONFIG WIRING DIAGRAM 12-090097-20-00 10

★★★ NOTICE ★★★

JPC CONTROLS RESERVES THE RIGHT TO MAKE CHANGES TO ITS PRODUCTS OR SPECIFICATIONS AT ANY TIME, WITHOUT NOTICE, IN ORDER TO IMPROVE THE DESIGN OR PERFORMANCE AND TO SUPPLY THE BEST POSSIBLE PRODUCT. THE INFORMATION IN THIS MANUAL HAS BEEN CAREFULLY CHECKED AND IS BELIEVED TO BE ACCURATE. HOWEVER, NO RESPONSIBILITY IS ASSUMED FOR INACCURACIES.



102 COMPASS POINT DRIVE, SUITE D • ST. CHARLES, MO 63301
(636) 946-3300 • FAX (636) 724-2492

For More Information Visit
www.jpcccontrols.com

<p style="text-align: center;">PROCON MODEL HPC HEATER POWER CONTROLLER</p>
--

The HPC family of Heater Power Controllers provides self contained power switching for electric heater applications. They may be controlled by many types of external temperature control systems. All that is necessary is a time proportioned On/Off signal. The power output will follow the signal and automatically be Zero Cross synchronized to minimize switching noise. The control lines are optically isolated from the power.

All Heater Power Controllers generate heat. This family of units eliminates the need to cool the enclosure due to this heat by passing it to the outside via the integral heat sink. The heat sink is mounted through the enclosure wall and thus dissipates the heat externally. A gasket is provided to insure a tight enclosure seal after mounting.

The HPC family is unique in that it minimizes installation time by grouping power controllers on to one heat sink. Each is an independent controller, with its own set of terminal blocks.

For ease of servicing, each of the SSRs may be replaced without removing the heat sink from the enclosure. Each SSR has a protective clear plastic cover over the wiring terminals.

The terminal blocks provide a separate wiring point for each wire, eliminating the need for multiple wires in a terminal block.

The single phase units use a one line break system, having one Solid State Relay per heater. The three phase units use a two line break system, having two Solid State Relays per heater. The unswitched line is passed through from L2 to H2 (single phase) or L3 to H3 (three phase) for ease of wiring. There are models available in all standard voltages.

From 1 to 6 SSRs may be mounted on the 3 basic heatsink sizes. In single phase units this allows up to 6 independent controllers. In the three phase units this allows up to 3 independent controllers.

The following table indicates the various standard models. Note that one model may be used across a series of line voltages. (E.G. HPC1-240/1/30 may be used on any single phase line voltage up to 240 VAC)

Single Phase Controllers

MODEL NUMBER	LINE VOLTAGE	CONTROLS PER HEATSINK	HEATSINK SIZE	LOAD CURRENT	LOAD WATTAGE
HPC1-240/1/30	120 VAC	1	A	1 x 30 A	1 x 3.6 KW
	208 VAC	1	A	1 x 30 A	1 x 6.2 KW
	240 VAC	1	A	1 x 30 A	1 x 7.2 KW
HPC2-240/1/30	120 VAC	2	A	2 x 30 A	2 x 3.6 KW
	208 VAC	2	A	2 x 30 A	2 x 6.2 KW
	240 VAC	2	A	2 x 30 A	2 x 7.2 KW
HPC3-240/1/30	120 VAC	3	B	3 x 30 A	3 x 3.6 KW
	208 VAC	3	B	3 x 30 A	3 x 6.2 KW
	240 VAC	3	B	3 x 30 A	3 x 7.2 KW
HPC4-240/1/30	120 VAC	4	B	4 x 30 A	4 x 3.6 KW
	208 VAC	4	B	4 x 30 A	4 x 6.2 KW
	240 VAC	4	B	4 x 30 A	4 x 7.2 KW
HPC5-240/1/30	120 VAC	5	C	5 x 30 A	5 x 3.6 KW
	208 VAC	5	C	5 x 30 A	5 x 6.2 KW
	240 VAC	5	C	5 x 30 A	5 x 7.2 KW
HPC6-240/1/30	120 VAC	6	C	6 x 30 A	6 x 3.6 KW
	208 VAC	6	C	6 x 30 A	6 x 6.2 KW
	240 VAC	6	C	6 x 30 A	6 x 7.2 KW
HPC1-480/1/30	277 VAC	1	A	1 x 30 A	1 x 8.3 KW
	480 VAC	1	A	1 x 30 A	1 x 14.4 KW
HPC2-480/1/30	277 VAC	2	A	2 x 30 A	2 x 8.3 KW
	480 VAC	2	A	2 x 30 A	2 x 14.4 KW
HPC3-480/1/30	277 VAC	3	B	3 x 30 A	3 x 8.3 KW
	480 VAC	3	B	3 x 30 A	3 x 14.4 KW
HPC4-480/1/30	277 VAC	4	B	4 x 30 A	4 x 8.3 KW
	480 VAC	4	B	4 x 30 A	4 x 14.4 KW
HPC5-480/1/30	277 VAC	5	C	5 x 30 A	5 x 8.3 KW
	480 VAC	5	C	5 x 30 A	5 x 14.4 KW
HPC6-480/1/30	277 VAC	6	C	6 x 30 A	6 x 8.3 KW
	480 VAC	6	C	6 x 30 A	6 x 14.4 KW

Three Phase Controllers

MODEL NUMBER	LINE VOLTAGE	CONTROLS PER HEATSINK	HEATSINK SIZE	LOAD CURRENT	LOAD WATTAGE
HPC1-240/3/30	208 VAC	1	A	1 x 30 A	1 x 10.8 KW
	240 VAC	1	A	1 x 30 A	1 x 12.5 KW
HPC2-240/3/30	208 VAC	2	B	2 x 30 A	2 x 10.8 KW
	240 VAC	2	B	2 x 30 A	2 x 12.5 KW
HPC3-240/3/30	208 VAC	3	C	3 x 30 A	3 x 10.8 KW
	240 VAC	3	C	3 x 30 A	3 x 12.5 KW
HPC1-480/3/30	480 VAC	1	A	1 x 30 A	1 x 24.9 KW
HPC2-480/3/30	480 VAC	2	B	2 x 30 A	2 x 24.9 KW
HPC3-480/3/30	480 VAC	3	C	3 x 30 A	3 x 24.9 KW

There are optional radiused corners on the heatsink for applications where sharp corners could be a problem. (Specify with -R suffix.)



Warning

The most common failure mode for Solid State Relays is shorted. The OEM installing this unit must provide backup mechanical safety for the system that insures that such a failure does not cause equipment damage or endanger the user.

MANUAL REVISIONS

<u>Revision #</u>	<u>Engineering #</u>	<u>Revisions Made</u>
Rev 03	DT900HPC	Origination

LIMITED WARRANTY

WARRANTY: JPC CONTROLS WARRANTS ITS NEW PRODUCTS TO BE FREE FROM DEFECTS IN MATERIALS AND WORKMANSHIP UNDER THE SERVICE FOR WHICH THEY ARE INTENDED. THIS WARRANTY IS EFFECTIVE FOR TWELVE MONTHS FROM THE DATE OF SHIPMENT.

EXCLUSIONS: THIS WARRANTY IS **IN LIEU OF** ANY OTHER WARRANTY EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF **MERCHANTABILITY** OR FITNESS FOR A PARTICULAR PURPOSE.

JPC CONTROLS IS NOT LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.



NO PERSON OTHER THAN AN OFFICER IS AUTHORIZED TO GIVE ANY OTHER WARRANTY OR ASSUME ANY LIABILITY.

REMEDIES: THE PURCHASER'S SOLE AND EXCLUSIVE REMEDY SHALL BE: (1) THE REPAIR OR REPLACEMENT OF DEFECTIVE PARTS OR PRODUCTS, WITHOUT CHARGE. (2) AT THE OPTION OF **JPC CONTROLS**, THE REFUND OF THE PURCHASE PRICE.


SPECIFICATIONS

Procon HPC HEATER POWER CONTROLLERS


OPERATING RANGE	0 to 50 Degrees C
STORAGE RANGE	-40 to 60 Degrees C
SIZE (HxWxD)	A -- 7.30 x 6.75 x 3.51 inches 185.42 x 171.45 x 89.15 mm
	B -- 13.70 x 6.75 x 3.51 inches 347.98 x 171.45 x 89.15 mm
	C -- 20.00 x 6.75 x 3.51 inches 508.00 x 171.45 x 89.15 mm
WEIGHT	A -- < 3 lbs. (1.36 kg)
	B -- ≤ 6 lbs. (2.72 kg)
	C -- ≤ 8 lbs. (3.63 kg)
CONNECTIONS	Power & Load: 30 Amp Pressure Connector, 22-10 AWG Control: 25 Amp Pressure Connector, 24-10 AWG
OUTPUT	SSR, Derated, Optically Isolated, Zero Cross for 30 AMP Load

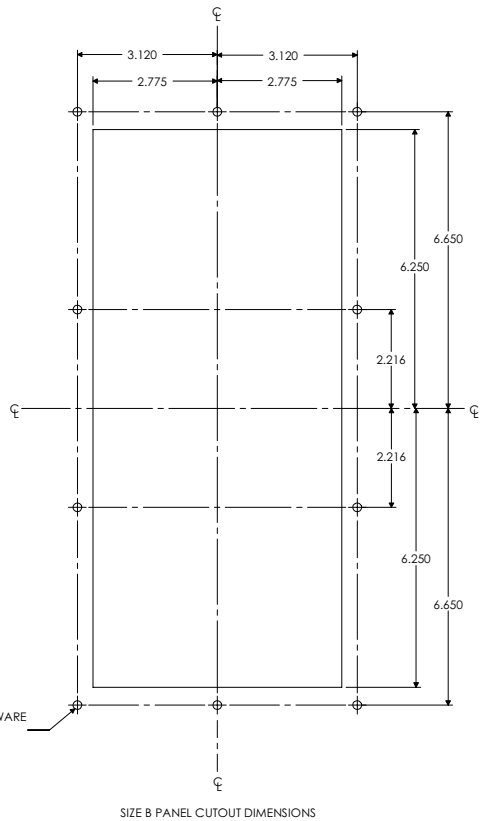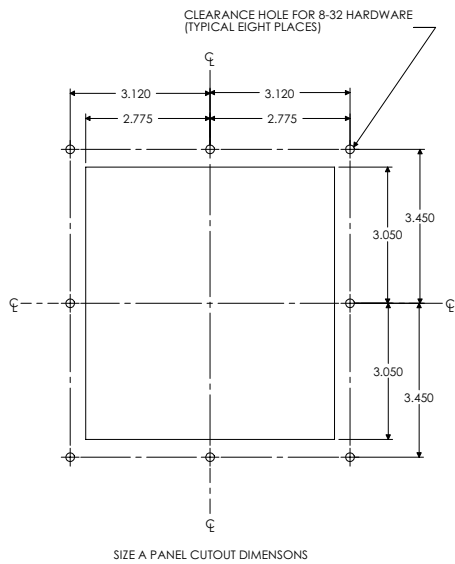


CLEARANCE HOLE FOR 8-32 HARDWARE
(TYPICAL TWELVE PLACES)

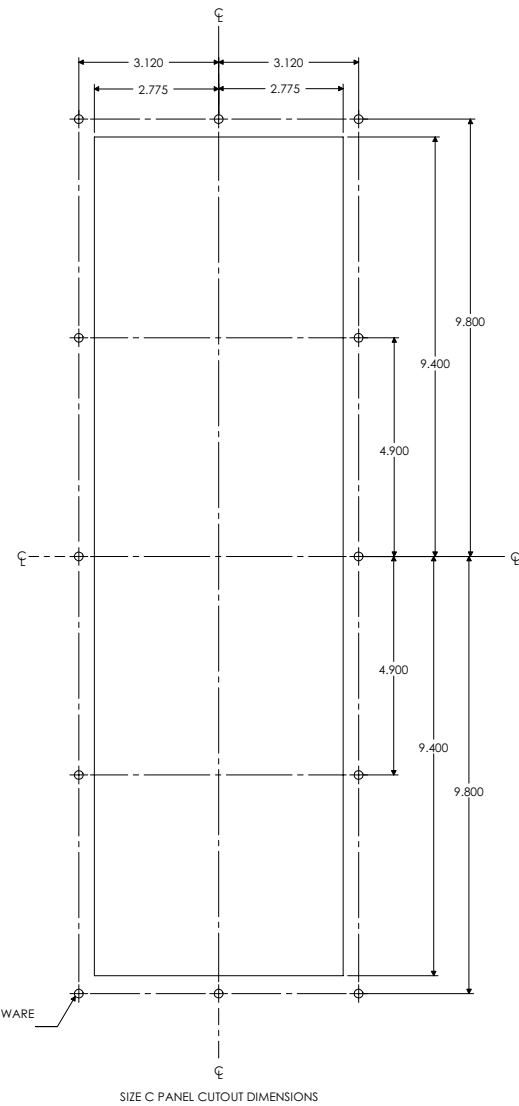

TOLERANCES UNLESS OTHERWISE SPECIFIED		JPC CONTROLS		102 COMPASS PT. DR. SUITE D, ST. CHARLES, MO 63301 (636) 946-3300 FAX (636) 724-2492 www.jpcccontrols.com	
PROCON HPC SERIES SCR POWER CONTROLLER PANEL CUTOUT DIMENSIONS					
APPROVAL		ENGR	DATE	DWN BY	MPJ
ALL DIMENSIONS ARE IN INCHES		GA	DATE	SHEET 1 OF 1	DATE 01/16/04
PATH = E:\C.C.\DTPRO\HPC\HPC-CUTOUT0.SLDRAW		SCALE	1=2	CHRD BY	00
		49	090096	30	00

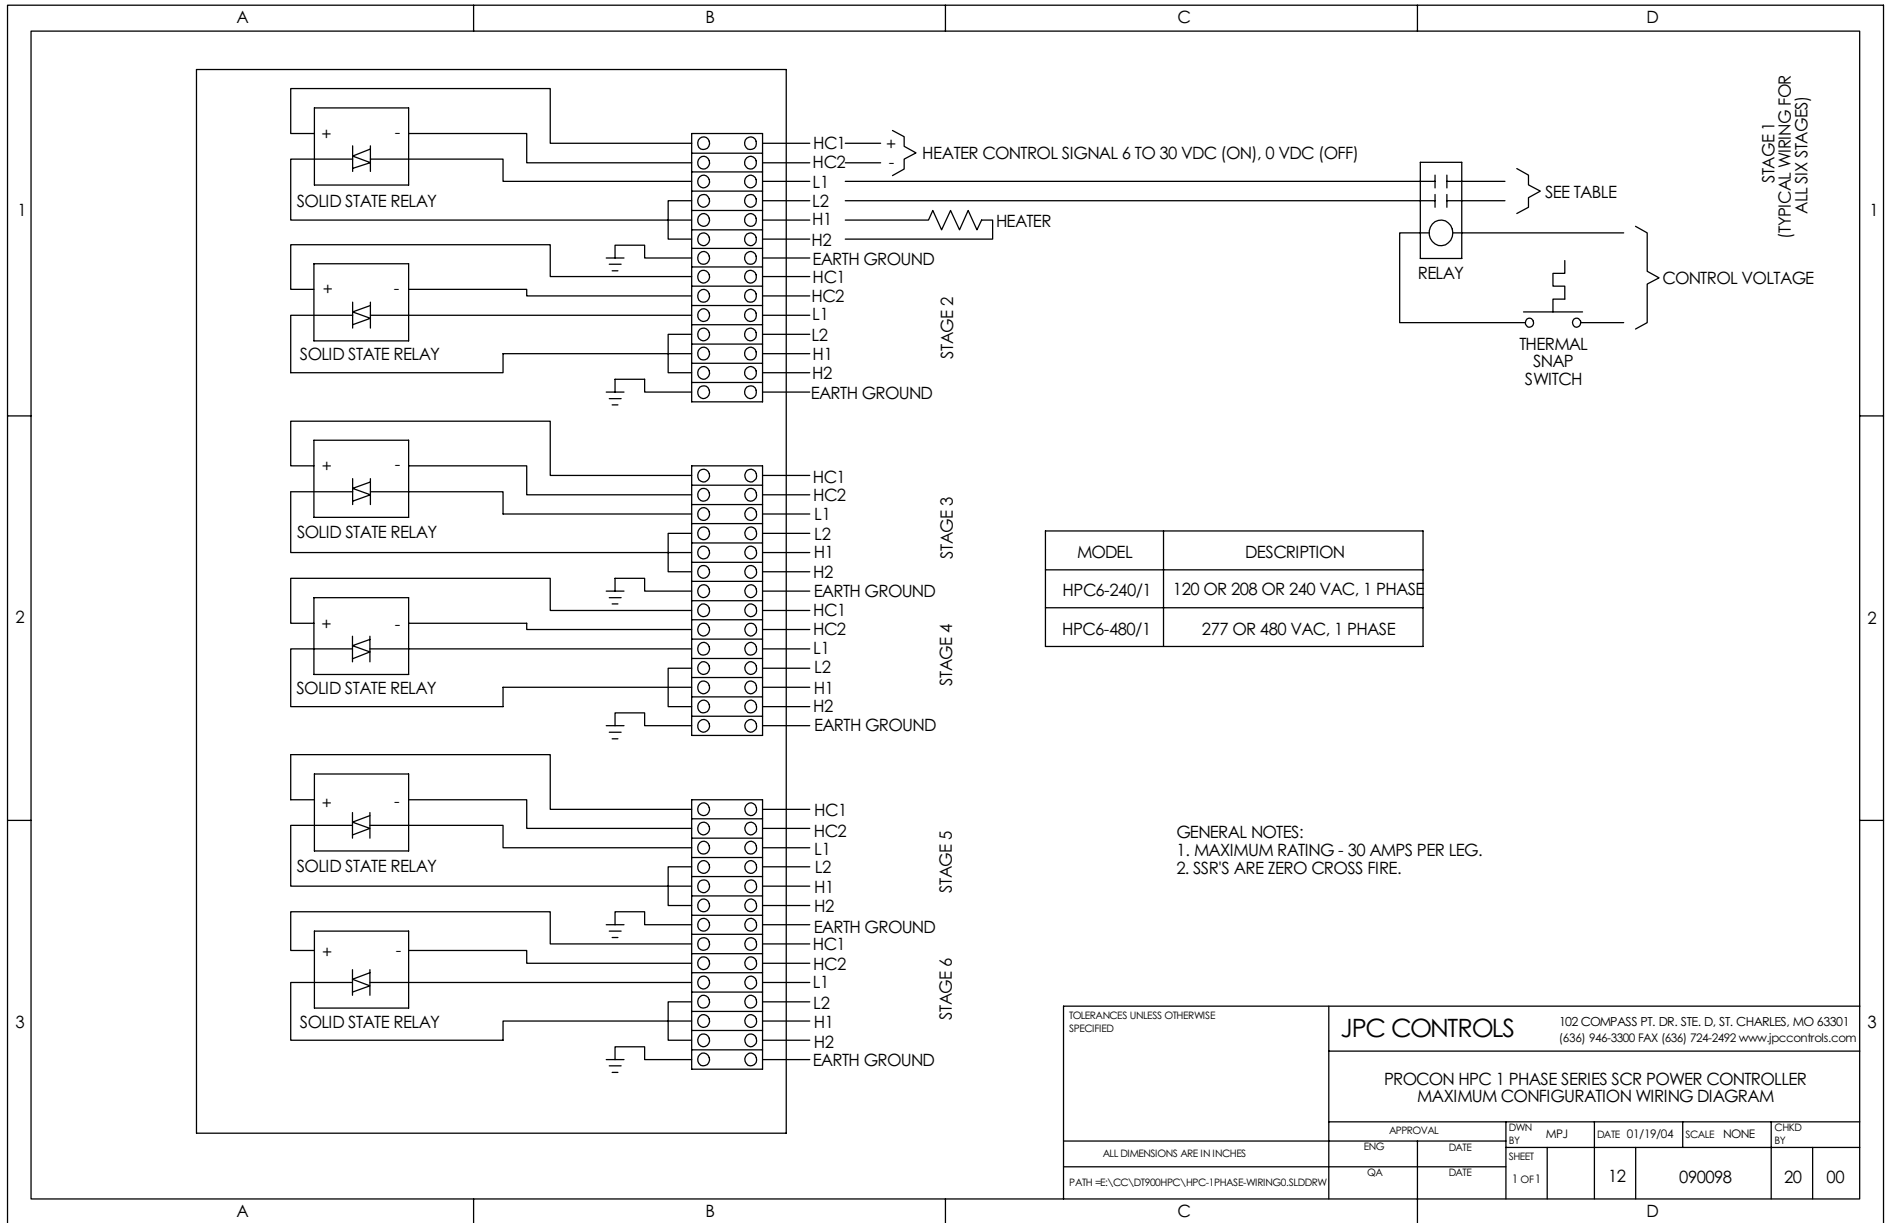

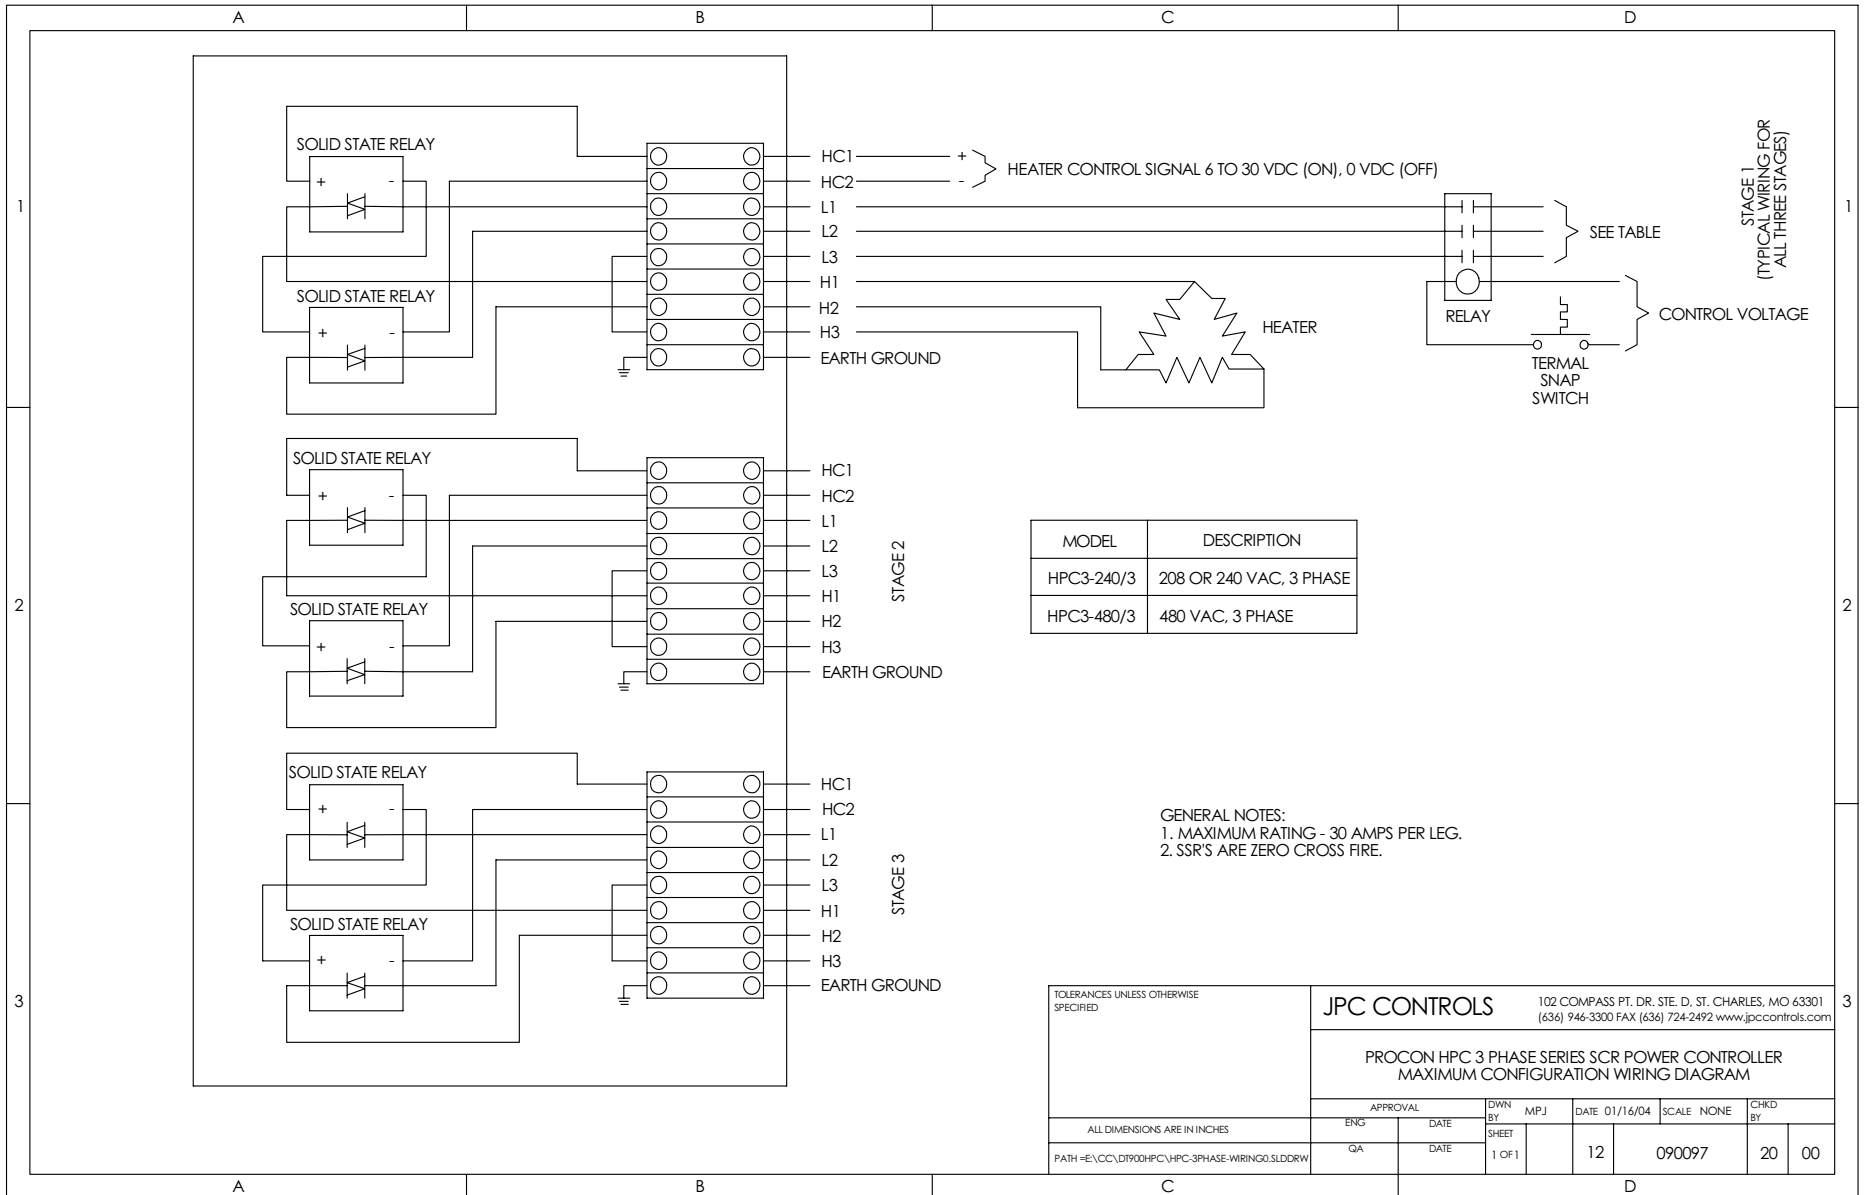

TOLERANCES UNLESS OTHERWISE SPECIFIED		JPC CONTROLS		102 COMPASS PT. DR. STE. D, ST. CHARLES, MO 63301 (636) 946-3300 FAX (636) 724-2492 www.jpcccontrols.com	
PROCON HPC 3 PHASE SERIES SCR POWER CONTROLLER MAXIMUM CONFIGURATION WIRING DIAGRAM					
APPROVAL		DWN BY	MPJ	DATE	01/16/04
ENG	DATE	SHEET		SCALE	NONE
GA	DATE	1 OF 1		12	090097
PATH =E:\CC\DI900HPC\HPC-3PHASE-WIRING0.SLDDRW					20 00